



B230B

MODEL: B230C

2-Piece Seal Weld 3-Way Ball Valve


Two Piece Seal Weld Ball Valve Standard Port Class 900

PRODUCT FEATURES


- Seal Welded Construction for Safety
- Available in WCB Carbon Steel with 316SS Trim. Or Full CF8M/316 Stainless
- 2160 WOG Rating on CF8M, 2220WOG on WCB
- Fully Compliant with ASME B16.34 Class 900
- Fully Compliant with API 608
- "L"Port Design can Replace (2) Valves
- NACE MR-01-75 Compliant
- Standard ISO Actuator Mounting Pads on all Sizes
- Standard 304SS Latch Lock Handle
- The Safest 3-Way Valve Available

SPECIFICATION

- Investment Cast Body
- Pressure Rating: CF8M Class 900 2160PSI WOG
WCB Class 900 2220PSI WOG
- Steam 150PSI (PTFE Seat)
- Size Available: 1/4" - 1"

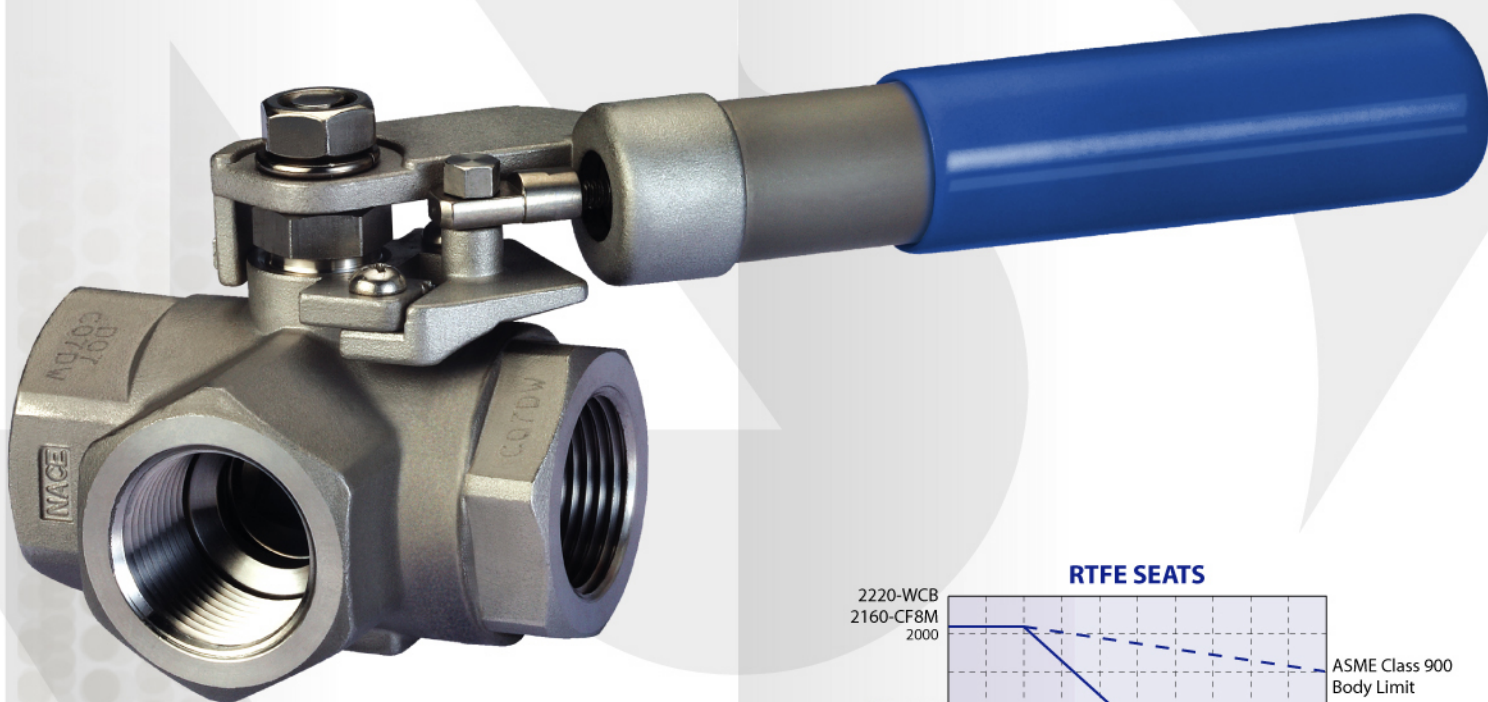


RTFE SEATS

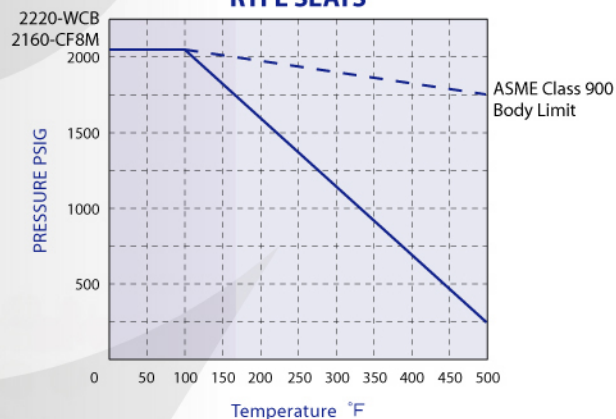

Keeping Safety
with safe Valves

KSV valves offer positive solutions for all your flow-control applications

B230B

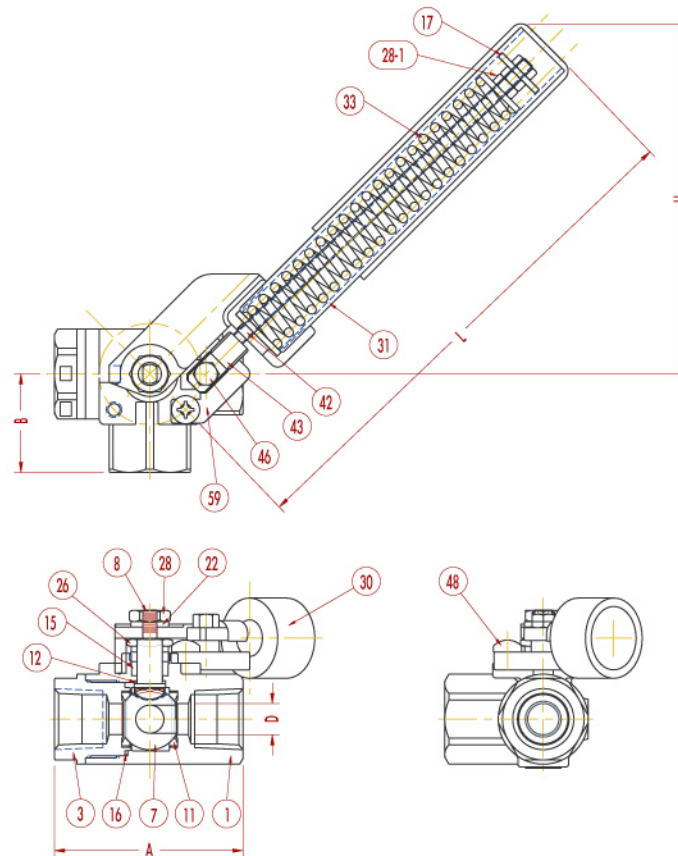

MATERIAL LIST

ITEM	Q'TY	PART NAME	B230B-1
1	1	BODY	A351-CF8M
3	1	BODY CAP	A351-CF8M
7	1	BALL	A351-CF8M
8	1	STEM	316 SS
11	2	SEAT	RTFE/TFM/TFE
12	1	THRUST WASHER	RTFE/TFM/TFE
16	1	GASKET	GRAPHITE
15	1SET	GLAND PACKING	PTFE/ GRAPHITE
17	2	WASHER	304 SS
22	1	SPRING WASHER	304 SS
26	1	GLAND	316 SS
28	1	LOCK NUT	304 SS
28-1	3	LOCK NUT	304 SS
30	1	SUPPORTER	A351-CF8M
31	1	PIPE	304 SS
33	1	SPRING	301 SS
42	1	ADJUSTABLE STME	304 SS
43	1	CONNECTOR	304 SS
46	1	HEX BOLT	304 SS
48	2	SOCKET HEAD CAP SCREWS	304 SS
59	1	MOUNTING PLATE	A351-CF8M

DIMENSIONS

NPS DN	A	B	D	H	L	IN/MM WEIGHT KGS/LBS
1/4"	2.64	1.38	0.43	4.88	7.19	0.56
8	67.00	35.00	11.00	124	182.50	1.10
1/2"	2.64	1.38	0.43	4.88	7.19	0.76
15	67.00	35.00	11.00	124	182.50	1.67
3/4"	3.08	1.54	0.59	5.03	7.36	1.25
20	78.30	39.00	15.00	127.68	187.00	2.75
1"	3.54	1.77	0.81	5.03	7.36	1.61
25	90.00	45.00	20.60	127.68	187.00	3.54



KONG SHENG VALVE IND., CO., LTD.
KONG JIH VALVE IND., CO., LTD.

Office.
tel. 886-2-2823 9311 fax. 886-2-2823 9319
Factory.
tel. 886-4-2681 5268 fax. 886-4-2681 5788
E-mail: marketing@ksvalve.com