

# B260G / B260W

MODEL: B260G/B260W

## 2-Piece Ball Valve

3000WOG / 6000WOG

### PRODUCT FEATURES

- Two-Pieces Ball Valve
- Manufacture & Tested to MSS SP-110, API 598, API 608, NACE MR0175
- Fire Test API 607 4<sup>th</sup> Edition
- Full Port and Reduced Port Version Available
- Seats in Delrin is Standard, PEEK as an option
- ISO 5211 Actuator Mounting Pad on all Sizes
- Standard Locking Handle

### SPECIFICATION

- Investment Cast for Valve Body
- Pressure Rating:  
3000 PSI WOG / 6000 PSI WOG
- Size Available: 1/4" to 2"
- Stainless Steel and Carbon Steel Available




Keeping Safety  
with safe Valves

KSV valves offer positive solutions for all your flow-control applications



# B260G/B260W

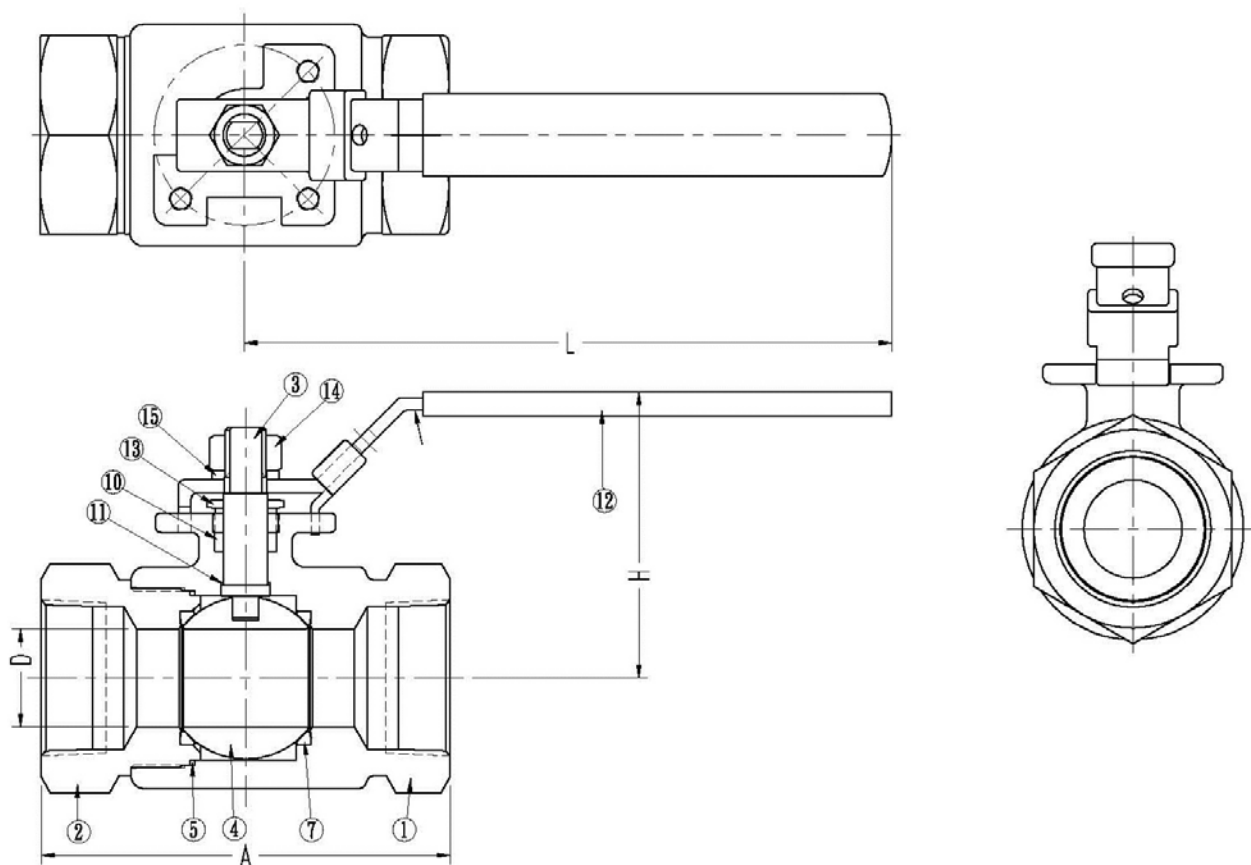

## MATERIAL LIST

| ITEM | Q'TY | PART NAME         | B260G-1/<br>B260W-1 | B260G-3/<br>B260W-3 |
|------|------|-------------------|---------------------|---------------------|
| 1    | 1    | BODY              | A351 CF8M           | A216 WCB            |
| 2    | 1    | ADAPTER           | A351 CF8M           | AISI 1017           |
| 3    | 1    | STEM              | SS 316              |                     |
| 4    | 1    | BALL              | A351 CF8M / SS 316  |                     |
| 5    | 1    | ADAPTER GASKET    | GRAPHITE            |                     |
| 7    | 2    | SEAT              | DELTRIN 100AF       |                     |
| 10   | 1    | PACKING           | GRAPHITE            |                     |
| 11   | 1    | THRUST BEARING    | PTFE                |                     |
| 12   | 1    | HANDLE ASSEMBLY   | SS 304              | CS                  |
| 13   | 1    | PACKING NUT       | SS 316              | CS                  |
| 14   | 1    | HANDLE NUT        | SS                  |                     |
| 15   | 1    | HANDLE NUT WASHER | SS                  |                     |

## DIMENSIONS

## IN/MM

| NPS<br>DN | ISO<br>5211 | A      | D     | H      | L      |
|-----------|-------------|--------|-------|--------|--------|
| 1/4"      | F03         | 3.00   | 0.25  | 5.00   | 2.24   |
| 8         | F03         | 76.20  | 6.35  | 127.00 | 57.00  |
| 1/2"      | F03         | 4.00   | 0.50  | 5.00   | 2.24   |
| 15        | F03         | 101.60 | 12.70 | 127.00 | 57.00  |
| 3/4"      | F04         | 4.25   | 0.75  | 5.83   | 2.83   |
| 20        | F04         | 107.95 | 19.05 | 148.00 | 72.00  |
| 1"        | F04         | 4.25   | 0.75  | 5.83   | 2.83   |
| 25        | F04         | 107.95 | 19.05 | 148.00 | 72.00  |
| 1-1/2"    | F07         | 5.25   | 1.50  | 10.00  | 4.45   |
| 40        | F07         | 133.35 | 38.10 | 254.00 | 113.00 |
| 2"        | F07         | 6.25   | 1.50  | 10.00  | 4.45   |
| 50        | F07         | 158.75 | 38.10 | 254.00 | 113.00 |



**KONG SHENG VALVE IND., CO., LTD.**  
**KONG JIH VALVE IND., CO., LTD.**

Office.  
tel. 886-2-2823 9311 fax. 886-2-2823 9319  
Factory.  
tel. 886-4-2681 5268 fax. 886-4-2681 5788  
E-mail: marketing@ksvalve.com