



B260G/B260W

MODEL: B260G/B260W

2-Piece Ball Valve

3000WOG / 6000WOG

PRODUCT FEATURES

- Two-Pieces Ball Valve
- Manufacture & Tested to MSS SP-110, API 598, API 608, NACE MR0175
- Fire Test API 607 4th Edition
- Full Port and Reduced Port Version Available
- Seats in Delrin is Standard, PEEK as an option
- ISO 5211 Actuator Mounting Pad on all Sizes
- Standard Locking Handle

SPECIFICATION

- InvestmentCast for Valve Body
- Pressure Rating:
3000 PSI WOG / 6000 PSI WOG
- Size Available: 1/4" to 2"
- Stainless Steel and Carbon Steel Available




Keeping Safe
with safe Valves

KJV valves offer positive solutions for all your flow-control applications



B260G /B260W

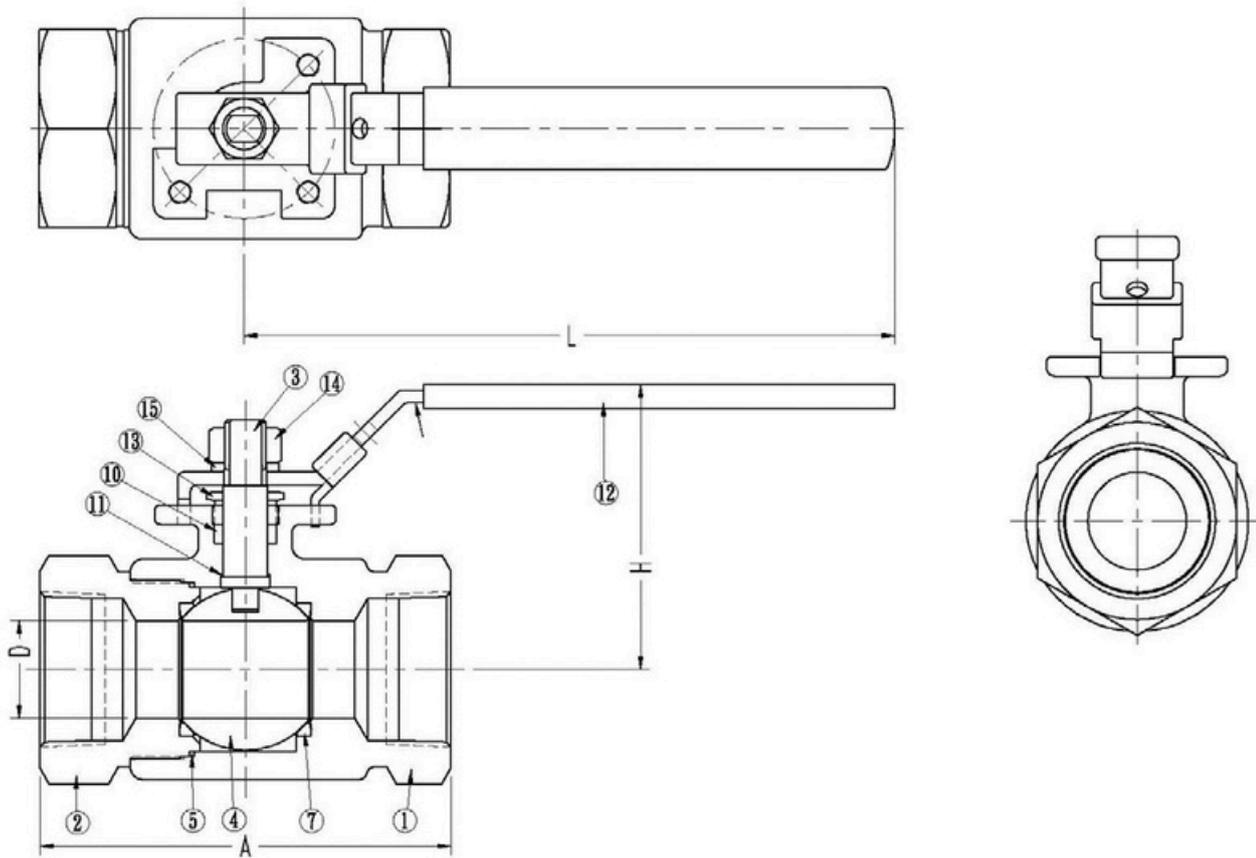

MATERIAL LIST

ITEM	Q'TY	PART NAME	B260G-1/ B260W-1	B260G-3/ B260W-3
1	1	BODY	A351 CF8M	A216 WCB
2	1	ADAPTER	A351 CF8M	AISI 1017
3	1	STEM	SS 316	
4	1	BALL	A351 CF8M / SS 316	
5	1	ADAPTER GASKET	GRAPHITE	
7	2	SEAT	DELRIN 100AF	
10	1	PACKING	GRAPHITE	
11	1	THRUST BEARING	PTFE	
12	1	HANDLE ASSEMBLY	SS 304	CS
13	1	PACKING NUT	SS 316	CS
14	1	HANDLE NUT	SS	
15	1	HANDLE NUT WASHER	SS	

DIMENSIONS

		IN/MM			
NPS	ISO	A	D	H	L
DN	5211				
1/4"	F03	3.00	0.25	5.00	2.24
8	F03	76.20	6.35	127.00	57.00
1/2"	F03	4.00	0.50	5.00	2.24
15	F03	101.60	12.70	127.00	57.00
3/4"	F04	4.25	0.75	5.83	2.83
20	F04	107.95	19.05	148.00	72.00
1"	F04	4.25	0.75	5.83	2.83
25	F04	107.95	19.05	148.00	72.00
1-1/2"	F07	5.25	1.50	10.00	4.45
40	F07	133.35	38.10	254.00	113.00
2"	F07	6.25	1.50	10.00	4.45
50	F07	158.75	38.10	254.00	113.00

