



TWO-PIECE BALL VALVE

2PC BALL VALVE FULL PORT 1000 PSI

● **PRODUCT FEATURES**

Two Piece Ball Valve

Manufactured & Tested to MSS SP-110, SP-61, SP-82, API 608, API 598, ANSI B16.34

Various Thread Types Available (NPT, BSP, DIN & ISO)

For General Purpose Industrial and Chemical Applications

Oval Handle as request

Adjustable Stem Packing with Blow-Out Proof Stem

With 2 holes Mount pad

● **SPECIFICATION**

Investment Cast Body

Pressure Rating: 1000 PSI WOG

Size Available: 1/4" to 3"



MODEL: B260B

KSV provides the positive solution for all your flow-control applications.



MATERIALS LIST:

ITEM	Q'TY	PART NAME	B260B-1	B260B-2	B260B-3
1	1	BODY	A351-CF8M	A216-WCB	
2	1	BALL	A351-CF8M	12L14/1045	A351-CF8M
3	1	STEM	316 SS	1045 CS	316 SS
4	1	BODY CAP	A351-CF8M	A216-WCB	
5	2	SEAT	RTFE/TFE/TFM		
6	1	STEM SEAL	CARBON 25%+TEFLON 75% /RTFE/TFE		
7	1 SET	STEM PACKING	TFE		
8	1	GLAND	316 SS	1045 CS	
9	1	HANDLE	304 SS	A283 CS	
10	1	SPRING WASHER	304 SS	1008 CS	
11	1	LOCK NUT	304 SS	A283 CS	
12	1	GASKET	TFE/TFM		

DIMENSION:

NPS DN	A	D	H	L	WEIGHT LBS/KGS
1/4"	2.20	0.43	2.20	4.21	0.60
8	56	11	55.8	107	0.27
3/8"	2.20	0.43	2.20	4.21	0.57
10	56	11	55.8	107	0.26
1/2"	2.60	0.56	2.30	4.21	0.75
15	66	14.2	58.3	107	0.34
3/4"	2.99	0.81	2.79	5.73	1.48
20	76	20.5	70.8	145.6	0.67
1"	3.54	1.00	2.96	5.73	2.23
25	90	25.4	75.3	145.6	1.01
1-1/4"	3.94	1.25	3.56	7.45	3.44
32	100	31.75	90.5	189.3	1.56
1-1/2"	4.41	1.50	3.84	7.45	5.36
40	112	38.1	97.5	189.3	2.43
2"	5.00	1.97	4.24	8.08	8.00
50	127	50	107.7	205.3	3.63
2-1/2"	6.57	2.50	5.00	10.00	15.04
65	167	63.5	127	254	6.82
3"	7.17	2.99	5.39	10.00	22.00
80	182	76	137	254	9.98

**R-TFE SEATS
GLASS FILLED TFE**

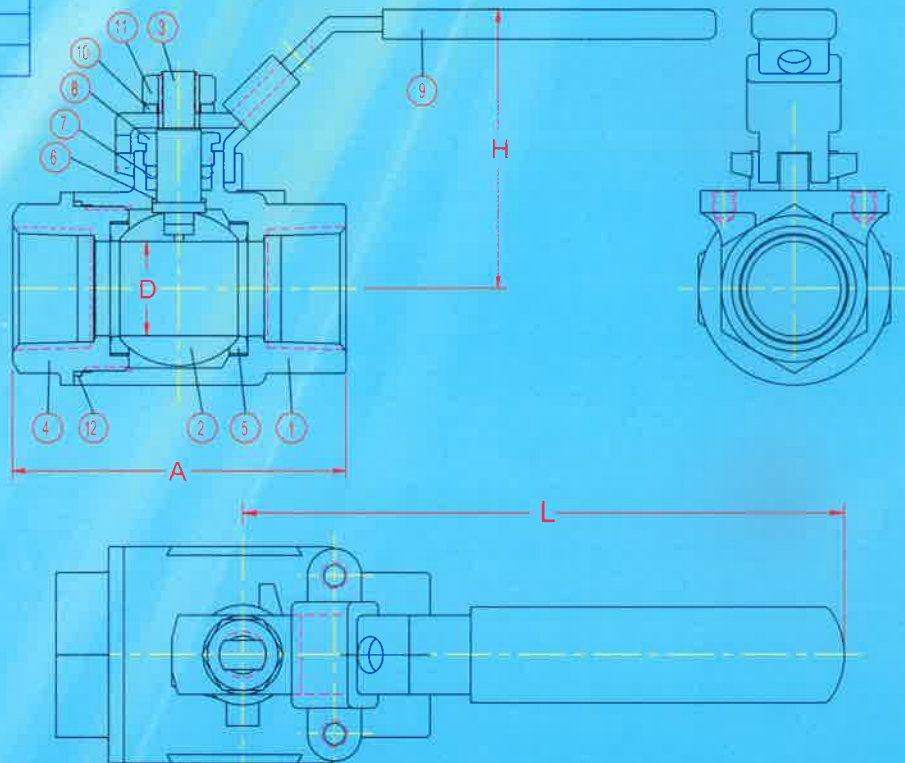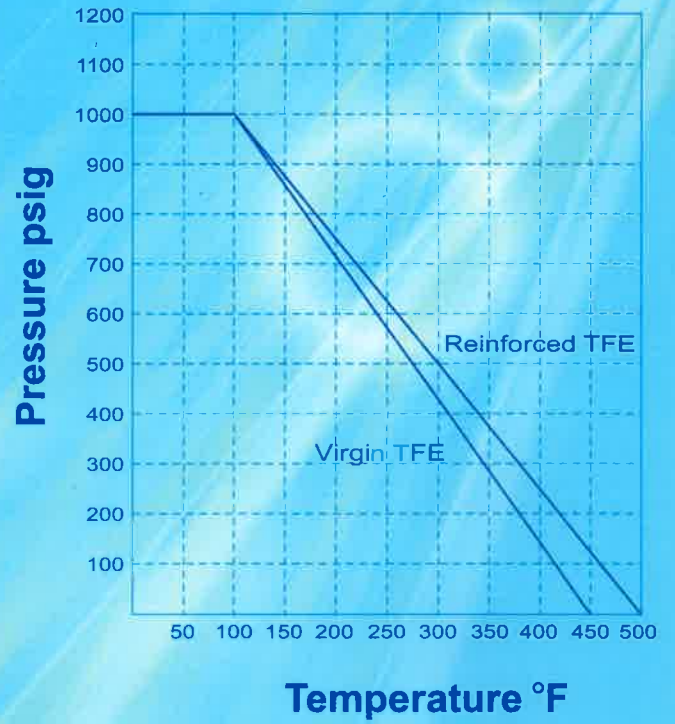

KONG SHENG VALVE IND. CO., LTD.
KONG JIH VALVE IND. CO., LTD.
 NO.350 5F SEC 7. CHENG TEH RD.,
 TAIPEI TAIWAN REP. OF CHINA

TEL: 886-2-28239311 886-4-26815268
 FAX: 886-2-28239319 886-4-26815788
 E-mail: service@ksvalve.com / ksv@ms15.hinet.net
 Website: www.ksvalve.com

